

: T-125  
 : 264 181 276  
 :  
 : -  
 :







T2 Technology

BCI		B						C			
		@25	@75	5	20	100				D	
<b>6V - T2 Technology™</b>											
GC2	<b>T-125</b>	448	132	195	245	1,60	1, 2, 3, 4	264	181	276	30

. 27°C 1.75 / .  
 B. 27°C 20 30°C 5 1.75 / .  
 C. 127 .  
 D.


(+25°C)					
	6V	12V	24V	36V	48V
	7.40	14.8	29.6	44.4	59.2
	6.60	13.2	26.4	39.6	52.8
	7.75	15.5	31.0	46.5	62.0

<b>1 ELPT</b>		31 10.7 - 11.9 5/16 - 18
<b>2 EHPT</b>		38 10.7 - 11.9 5/16 - 18
<b>3 EAP</b>		24 5.6 - 7.9
<b>4 EUT</b>		28 10.7 - 11.9 5/16 - 18



0.028 / .- 5.55°C 25°C ( 0.028 / .- 5.55°C  
 25°C 0.028 / .- 10°C 25°C

Рабочая температура	Саморазряд
-20°C to +45°C. При температуре ниже 0°C поддерживать состояние заряда более, чем на 60%	5 - 15% в месяц в зависимости от температуры хранения

( ELPT),

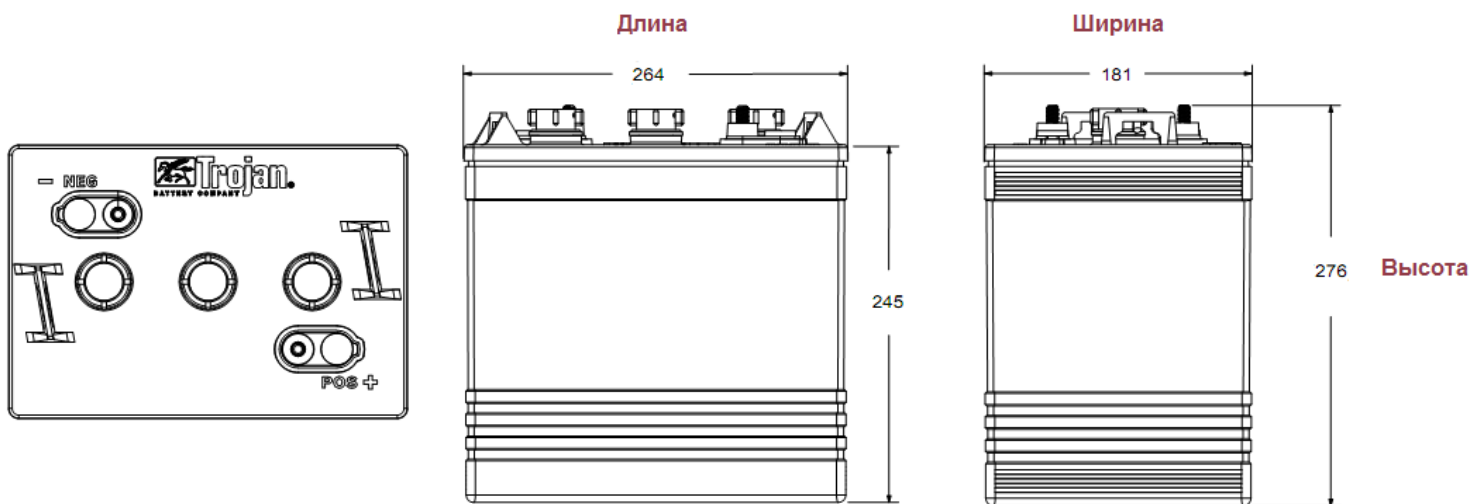

TROJAN T-125

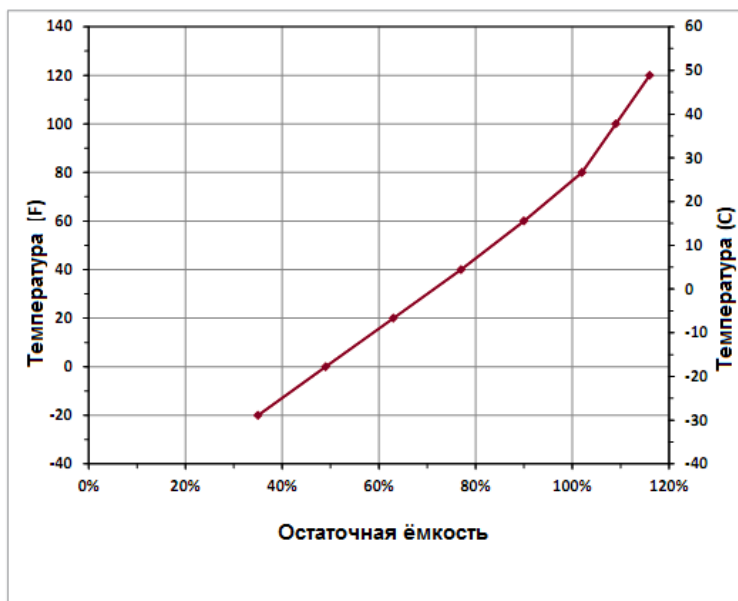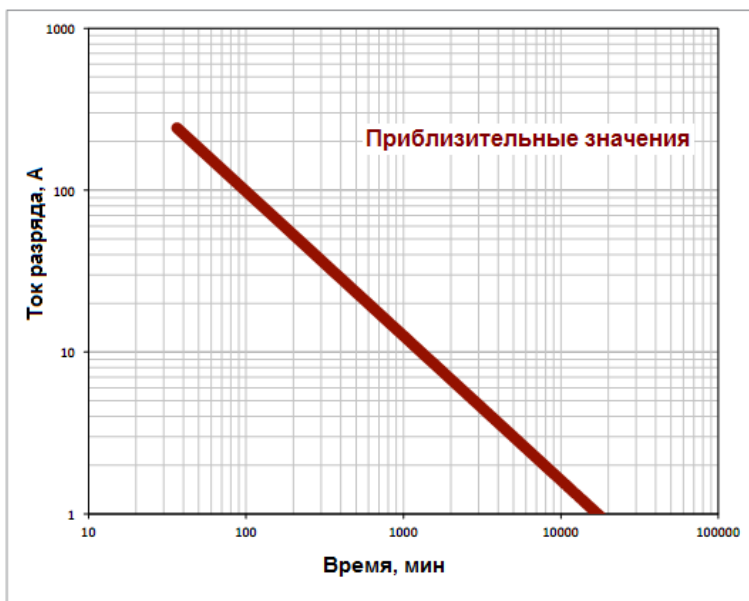

«  
+7 495 646 83 74  
www.acctrade.ru