

: T-145
 : 264 181 295
 :
 :
 :



| BCI | | | | | | | | C | | | |
|----------------------------|--------------|-----|-----|-----|-----|------|------------|-----|-----|-----|----|
| | | @25 | @75 | 5 | 20 | 100 | | | | D | |
| 6V - T2 Technology™ | | | | | | | | | | | |
| GC2H | T-145 | 530 | 145 | 215 | 260 | 1,72 | 1, 2, 3, 4 | 264 | 181 | 295 | 33 |

27°C 1.75 /

B. 27°C 20 30°C 5 1.75 /
 C.
 D. 127 d




| (+25°C) | | | | | |
|-----------|------|------|------|------|------|
| | 6V | 12V | 24V | 36V | 48V |
| | 7.40 | 14.8 | 29.6 | 44.4 | 59.2 |
| | 6.60 | 13.2 | 26.4 | 39.6 | 52.8 |
| | 7.75 | 15.5 | 31.0 | 46.5 | 62.0 |

0.028 / .- 5.55°C 25°C (0.028 / .- 5.55°C
25°C 0.028 / .- 10°C 25°C)

| | |
|---------------|--------------------------------|
| 1 ELPT | 31 10.7 – 11.9 5/16 – 18 |
| 2 EHPT | 38 10.7 – 11.9 5/16 – 18 |
| 3 EAP | 24 5.6 – 7.9 |
| 4 EUT | 28 10.7 – 11.9 5/16 – 18 |

| Рабочая температура | Саморазряд |
|--|---|
| -20°C to +45°C. При температуре ниже 0°C поддерживать состояние заряда более, чем на 60% | 5 – 15% в месяц в зависимости от температуры хранения |

(ELPT),

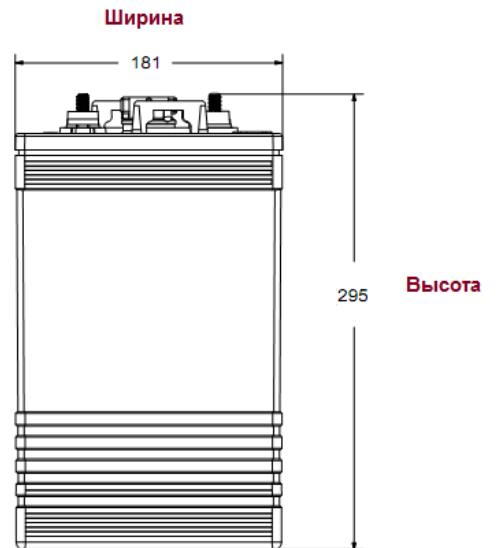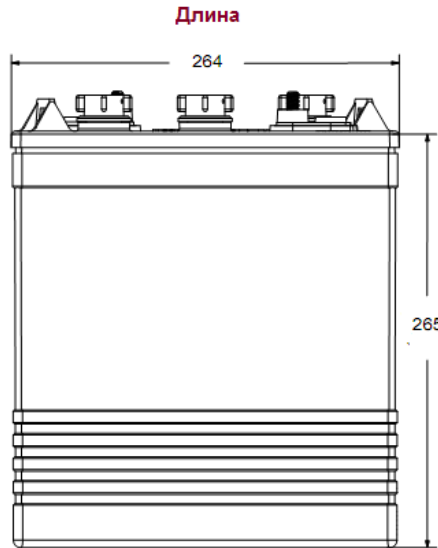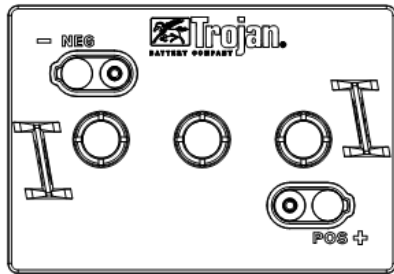

TROJAN T-145

